

Nd:YAG Laser for Marking



DPL *Smart Marker*



The new diode pumped solid state Laser
DPL*Smart* Marker is a perfect tool to step into
cost effective laser marking of different materials.

- low running costs
- compact
- air cooled

Technical Data DPLSmart Marker

<table border="1"> <tr> <td>Laser unit</td> <td>Diode-pumped, active quality-switched solid-state laser (Nd:YAG) Integrated pilot laser: 650 nm/1 mW</td> </tr> <tr> <td>Wave length</td> <td>1064 nm</td> </tr> <tr> <td>Materials</td> <td>Marking on metal, carbide, previous metal, aluminium, synthetic material, foil, ceramic, etc.</td> </tr> <tr> <td>Applications</td> <td>Marking on tools, medical instruments, electronic parts, type plates, serial number, Logo, graphic, text, etc.</td> </tr> <tr> <td>Pulse length</td> <td>15 - 30 nsec (frequency dependent)</td> </tr> <tr> <td>Peak pulse power</td> <td>50 kW@4000 Hz</td> </tr> <tr> <td>Beam quality</td> <td>TEM₀₀, M²<1,2</td> </tr> <tr> <td>Puls frequency</td> <td>1 - 100 kHz</td> </tr> <tr> <td>Laser protective class</td> <td>4, optional laser protective class 1</td> </tr> <tr> <td>Control unit</td> <td> <ul style="list-style-type: none"> Integrated control unit in the laser source Power supply module Multi-processor system for system control and data processing Integrated laser diode driver and TE-controller Integrated scanner control Integrated HF-driver Connection of all components via a bus system </td> </tr> <tr> <td>Scan unit</td> <td>Galvanometric scanner Scanning speed <5 m/sec Focal lens: optional</td> </tr> <tr> <td>Spot diameter ⁽¹⁾</td> <td> <table border="1"> <tr> <td>F-Theta 100</td> <td>F-Theta 163</td> <td>F-Theta 254</td> </tr> <tr> <td>25</td> <td>35</td> <td>50 [µm]</td> </tr> </table> </td> </tr> <tr> <td>Size of marking field</td> <td> <table border="1"> <tr> <td>60 x 60</td> <td>110 x 110</td> <td>180 x 180 [mm x mm]</td> </tr> </table> </td> </tr> <tr> <td>Supply unit</td> <td>Laser source with integrated control unit, An external supply unit is not required</td> </tr> <tr> <td>Cooling</td> <td>Laser source with integrated thermoelectric air cooling External cooling supply is not required</td> </tr> <tr> <td>System requirements</td> <td>IBM-compatible PC, Pentium 4, > 2 GHz, Main memory: 512 MB Operating system: WINDOWS 2000/XP Drives: hard disk drive, CD-Rom PC-interfaces: USB 2.0</td> </tr> </table>	Laser unit	Diode-pumped, active quality-switched solid-state laser (Nd:YAG) Integrated pilot laser: 650 nm/1 mW	Wave length	1064 nm	Materials	Marking on metal, carbide, previous metal, aluminium, synthetic material, foil, ceramic, etc.	Applications	Marking on tools, medical instruments, electronic parts, type plates, serial number, Logo, graphic, text, etc.	Pulse length	15 - 30 nsec (frequency dependent)	Peak pulse power	50 kW@4000 Hz	Beam quality	TEM ₀₀ , M ² <1,2	Puls frequency	1 - 100 kHz	Laser protective class	4, optional laser protective class 1	Control unit	<ul style="list-style-type: none"> Integrated control unit in the laser source Power supply module Multi-processor system for system control and data processing Integrated laser diode driver and TE-controller Integrated scanner control Integrated HF-driver Connection of all components via a bus system 	Scan unit	Galvanometric scanner Scanning speed <5 m/sec Focal lens: optional	Spot diameter ⁽¹⁾	<table border="1"> <tr> <td>F-Theta 100</td> <td>F-Theta 163</td> <td>F-Theta 254</td> </tr> <tr> <td>25</td> <td>35</td> <td>50 [µm]</td> </tr> </table>	F-Theta 100	F-Theta 163	F-Theta 254	25	35	50 [µm]	Size of marking field	<table border="1"> <tr> <td>60 x 60</td> <td>110 x 110</td> <td>180 x 180 [mm x mm]</td> </tr> </table>	60 x 60	110 x 110	180 x 180 [mm x mm]	Supply unit	Laser source with integrated control unit, An external supply unit is not required	Cooling	Laser source with integrated thermoelectric air cooling External cooling supply is not required	System requirements	IBM-compatible PC, Pentium 4, > 2 GHz, Main memory: 512 MB Operating system: WINDOWS 2000/XP Drives: hard disk drive, CD-Rom PC-interfaces: USB 2.0	<table border="1"> <tr> <td>Interfaces laser system</td> <td>PC-interface: <ul style="list-style-type: none"> USB 2.0 Laser control interface for: <ul style="list-style-type: none"> Ready for operation or fault signals External Shutter-Interlock External Shutter warning light 4 digital input interfaces 4 digital output interfaces Power supply: <ul style="list-style-type: none"> Standard appliance outlet with microfuse </td> </tr> <tr> <td>Power supply and consumption</td> <td>Connection parameter: 100 - 240 VAC / 16 A / 50 - 60 Hz Power consumption (typ.): DPLSmartMarker 100 W Cooling: Only air-cooled, no water supply required</td> </tr> <tr> <td>Operation temperature</td> <td>15 °C - 35 °C [59 °F - 95 °F]</td> </tr> <tr> <td>Humidity (relative)</td> <td>30 % - 85 %, non-condensing</td> </tr> <tr> <td>Weight</td> <td>15 kg</td> </tr> <tr> <td>Dimensions</td> <td>Laser source incl. scanner (L x W x H): 603 mm x 201 mm x 235 mm</td> </tr> <tr> <td>Options</td> <td>Hardware: <ul style="list-style-type: none"> Div. laser protective encasement, rotary indexing table, x-y-z axes, foillabelsystem, exhaust, laser protective accessories, Further options and special solutions on request. Software: <ul style="list-style-type: none"> Barcode Module Data Matrix Code Module </td> </tr> </table>	Interfaces laser system	PC-interface: <ul style="list-style-type: none"> USB 2.0 Laser control interface for: <ul style="list-style-type: none"> Ready for operation or fault signals External Shutter-Interlock External Shutter warning light 4 digital input interfaces 4 digital output interfaces Power supply: <ul style="list-style-type: none"> Standard appliance outlet with microfuse 	Power supply and consumption	Connection parameter: 100 - 240 VAC / 16 A / 50 - 60 Hz Power consumption (typ.): DPLSmartMarker 100 W Cooling: Only air-cooled, no water supply required	Operation temperature	15 °C - 35 °C [59 °F - 95 °F]	Humidity (relative)	30 % - 85 %, non-condensing	Weight	15 kg	Dimensions	Laser source incl. scanner (L x W x H): 603 mm x 201 mm x 235 mm	Options	Hardware: <ul style="list-style-type: none"> Div. laser protective encasement, rotary indexing table, x-y-z axes, foillabelsystem, exhaust, laser protective accessories, Further options and special solutions on request. Software: <ul style="list-style-type: none"> Barcode Module Data Matrix Code Module
Laser unit	Diode-pumped, active quality-switched solid-state laser (Nd:YAG) Integrated pilot laser: 650 nm/1 mW																																																							
Wave length	1064 nm																																																							
Materials	Marking on metal, carbide, previous metal, aluminium, synthetic material, foil, ceramic, etc.																																																							
Applications	Marking on tools, medical instruments, electronic parts, type plates, serial number, Logo, graphic, text, etc.																																																							
Pulse length	15 - 30 nsec (frequency dependent)																																																							
Peak pulse power	50 kW@4000 Hz																																																							
Beam quality	TEM ₀₀ , M ² <1,2																																																							
Puls frequency	1 - 100 kHz																																																							
Laser protective class	4, optional laser protective class 1																																																							
Control unit	<ul style="list-style-type: none"> Integrated control unit in the laser source Power supply module Multi-processor system for system control and data processing Integrated laser diode driver and TE-controller Integrated scanner control Integrated HF-driver Connection of all components via a bus system 																																																							
Scan unit	Galvanometric scanner Scanning speed <5 m/sec Focal lens: optional																																																							
Spot diameter ⁽¹⁾	<table border="1"> <tr> <td>F-Theta 100</td> <td>F-Theta 163</td> <td>F-Theta 254</td> </tr> <tr> <td>25</td> <td>35</td> <td>50 [µm]</td> </tr> </table>	F-Theta 100	F-Theta 163	F-Theta 254	25	35	50 [µm]																																																	
F-Theta 100	F-Theta 163	F-Theta 254																																																						
25	35	50 [µm]																																																						
Size of marking field	<table border="1"> <tr> <td>60 x 60</td> <td>110 x 110</td> <td>180 x 180 [mm x mm]</td> </tr> </table>	60 x 60	110 x 110	180 x 180 [mm x mm]																																																				
60 x 60	110 x 110	180 x 180 [mm x mm]																																																						
Supply unit	Laser source with integrated control unit, An external supply unit is not required																																																							
Cooling	Laser source with integrated thermoelectric air cooling External cooling supply is not required																																																							
System requirements	IBM-compatible PC, Pentium 4, > 2 GHz, Main memory: 512 MB Operating system: WINDOWS 2000/XP Drives: hard disk drive, CD-Rom PC-interfaces: USB 2.0																																																							
Interfaces laser system	PC-interface: <ul style="list-style-type: none"> USB 2.0 Laser control interface for: <ul style="list-style-type: none"> Ready for operation or fault signals External Shutter-Interlock External Shutter warning light 4 digital input interfaces 4 digital output interfaces Power supply: <ul style="list-style-type: none"> Standard appliance outlet with microfuse 																																																							
Power supply and consumption	Connection parameter: 100 - 240 VAC / 16 A / 50 - 60 Hz Power consumption (typ.): DPLSmartMarker 100 W Cooling: Only air-cooled, no water supply required																																																							
Operation temperature	15 °C - 35 °C [59 °F - 95 °F]																																																							
Humidity (relative)	30 % - 85 %, non-condensing																																																							
Weight	15 kg																																																							
Dimensions	Laser source incl. scanner (L x W x H): 603 mm x 201 mm x 235 mm																																																							
Options	Hardware: <ul style="list-style-type: none"> Div. laser protective encasement, rotary indexing table, x-y-z axes, foillabelsystem, exhaust, laser protective accessories, Further options and special solutions on request. Software: <ul style="list-style-type: none"> Barcode Module Data Matrix Code Module 																																																							

(1) Spot diameter at the work piece. Deviations because different materials are possible.

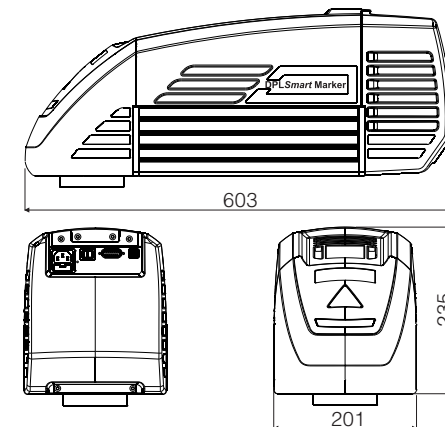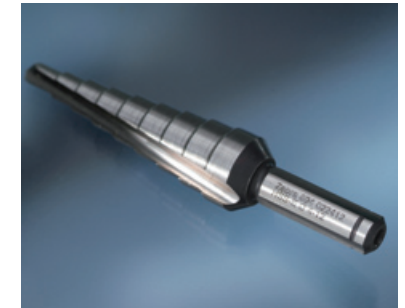

ACI 03.2008, this is subject to alterations without prior notice in case of mistakes or technical changes. All designated trademarks and brands are the property of their respective owners. · LANDSIEDEL | MÜLLER | FLAGMEYER www.l-m-1.de